


Addendum

Product:	Schneider Soft Starter
Models affected:	ATS22 Size D and E (C21, C25, C32 C41, C48 and C49)
Notification:	Schneider ATS soft starters have busbar connections that accept M12 fixings, when using LA9F702 terminal shrouds the supplied M12 fixings should be discarded and M10 fixings should be used.

Bus bar connections for frame sizes C to E

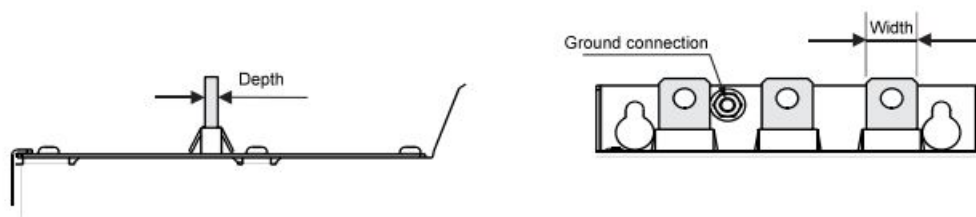

Frame Size	ATS22	1/L1 3/L2 5/L3 and 2/T1 4/T2 6/T3 power supply and output to motor							
		Bar			Cable and cover				
		Width	Depth	Bolt	Size	Gauge	Cover	Tightening torque	
		mm (in.)	mm (in.)	M	mm ²	MCM	Ref	N·m	lb·in
C	C11, C14, C17	20 (0.79)	5 (0.2)	8 (0.31)	95	250	LA9F702	18	159
D	C21, C25, C32, C41	30 (1.18)	5 (0.2)	12 (0.47)	2x150	2x250	LA9F703	57	503
E	C48, C59	40 (1.57)	5 (0.2)	12 (0.47)	2x240	2x500	LA9F703	57	503